

# CIS XP TILE ADHESIVE

CEMENT BASED TILE ADHESIVE

PRODUCT CATEGORY: TILE ADHESIVE

## PRODUCT DESCRIPTION

CIS XP TILE ADHESIVE is a polymer modified, cementitious adhesive, that can be used in slurry form on semi-wet screed, for wet-on-wet fixing of tiles, as well as an adhesive paste for fixing tiles on floor and wall.

## USES & APPLICATIONS

- For Internal tiling application on walls
- For Internal tiling application on floors
- Tile repairs & Rehabilitation works

## FEATURES & BENEFITS

### APPLICATION METHOD

1. Surface Preparation Surface temperature should be cool before application, ideally below 35 degrees. Surface should be structurally sound and free from dirt, oil, grease, loose peeling paint, concrete sealer or curing compound. All slabs must be plumb and true with in: Walls 3mm in 2.5m, and Floors- 1.5mm in 1.0m. Rough or uneven concrete surfaces should be made smooth with Screed/Plaster material. Use a wood float for better finish. Dry, dusty concrete slabs or masonry should be dampened and excess water should be swept off. Installation may be made on a damp surface. New concrete slabs shall be damp cured and should be 28 days old before application.

### 2. MIXING AND BLENDING


Take 5 - 6 Litres of potable water into a clean container. Gradually mix 20 Kg CIS XP TILE ADHESIVE with slow speed mixer to get a uniform lump-free paste in workable consistency. Allow paste to settle for 5-10 minutes. Adjust consistency, if necessary.

Mixed paste should be used within 90-120 minutes. Under coats of coarser coat should be allowed to dry & shrink before subsequent coats are applied to avoid cracking as following up with finishing coat to soon in common of cracking hence avoided.

The wall should be soaked but only damped evenly. Plastering on very wet and greasy surface should be avoided.

### 3. MIXING APPLICATION

Apply adhesive uniformly on a substrate to a desired thickness with flat side of notch trowel, Comb with a notch trowel using notched side. Use proper size of notched trowel to ensure full bedding of the tile. Spread as much

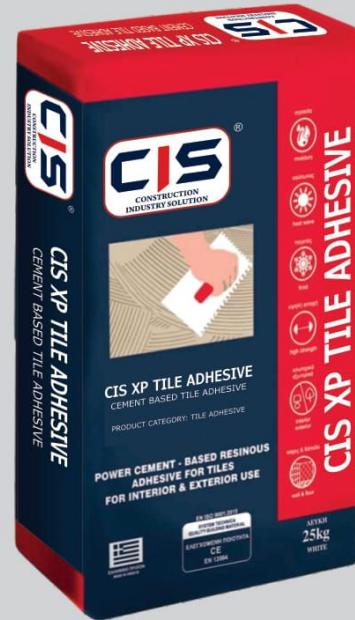

# CIS XP TILE ADHESIVE

CEMENT BASED TILE ADHESIVE

PRODUCT CATEGORY: TILE ADHESIVE

adhesive paste as it can be tiled within 10 minutes accommodate thermal expansion and contraction. As required one can use spacer to provide grout joints between tilesstones. Remove the spacers when the adhesive is firmly set. If the Tile adhesive is dried and skinned, then adhesive should be removed and replaced with a fresh adhesive.

## PACKING

5 kg , 25 kg

## SHELF LIFE

12 months in cool and dry place without opened or seal properly